
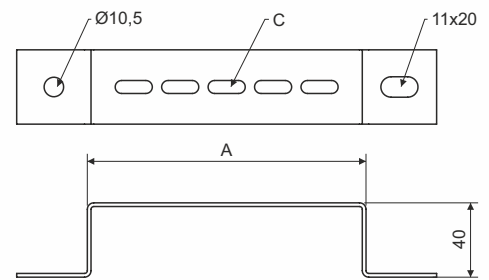


type number	A (mm)	B (mm)	C perforation (mm)	weight (kg/pc)
VMB 100_S VMB 100_F	100	40	7x20 in one line	0,15
VMB 150_S VMB 150_F	150	40	7x20 in one line	0,17
VMB 200_S VMB 200_F	200	40	7x20 in one line	0,20
VMB 300_S VMB 300_F	300	50	7x32 in two lines	0,32
VMB 400_S VMB 400_F	400	50	7x32 in two lines	0,39
VMB 500_S VMB 500_F	500	50	7x32 in two lines	0,46
VMB 600_S VMB 600_F	600	50	7x32 in two lines	0,53

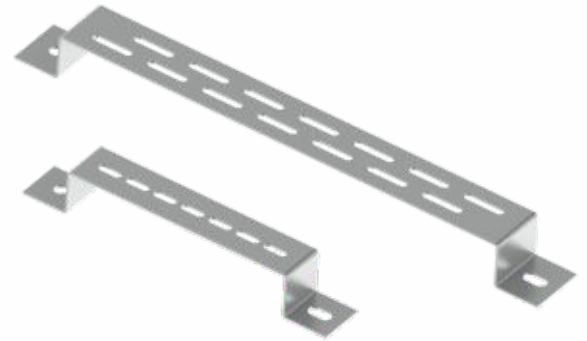

product description: This bracket is used to attach the cable tray to the floor or the wall. The cable tray is fastened using NSM 6X10 bolts. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with an F surface finish. The bracket is attached to the base using Ø 10 mm anchors.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

psales amount: 1 pc

meets the requirements: ČSN EN 61537:02

storage: ČSN EN 60721-3-1

