


type number	max. load (kg)	weight (kg/pc)	thickness of metal sheet (mm)	🔥
<b>ZVB 1.5_S</b>	60	0,02	1	🔥




**product description:** The outer side hanger is used to suspend cable trays running through cable ladders from the ZT 8 threaded rod. The hanger is attached to the tray by snapping the protrusions on the hanger into the sidewalls of the ladder. The threaded rod ZT 8 is attached using a PD 8 washer and M 8 nut. 1 mounting point is created with 2 pieces of ZVB 1.5. The product is protected by the utility model.



**surface finish:** S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm

**sales amount:** 1 pc

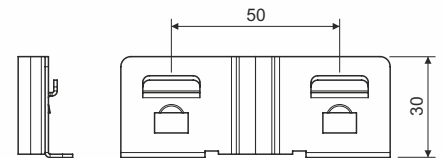

**classification 🔥:** ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire



🔥 products are approved for standard constructions

**storage:** ČSN EN 60721-3-1

